

Flow rate sensors for fluid media with an end value of 10...100 l/min | SDN 552/2 GAA

- 7 segment flow rate indication
- 2 x analog output
- Working range 2...20 l/min
- Flow and temperature monitoring in water and water-glycol mixtures


2...20 l/min - 2x 4...20 mA



TYPE	SDN 552/2 GAA
Product ID	P11317
Medium	water, water, water/glycol
Detection range water	2 l/min ... 20 l/min
Detection range water/glycol	2 l/min ... 20 l/min
Temperature monitoring	-10 °C ... 90 °C
Inner diameter d	15 mm
Outer Diameter Pipe mm	15 mm
Process connection	tube fittings for steel tubes accord. to ISO 3304 / DIN 2391
Output	2 x analog output 4...20 mA
Supply voltage	24 V DC +/- 10 %
Current consumption max.	100 mA
Switching current max.	200 mA (20 °C)
Load RL	200 Ω ... 500 Ω
Reverse polarity protection	✓
Ambient temperature	0 °C ... 60 °C
Medium temperature	-10 °C ... 90 °C
Reaction time typ.	1 s ... 8 s
Programmable functions	analog range, display flow/temperature, glycol percentage, adjustable to reference, averaging, access code
Compressive strength	20 bar

Material sensor touched by medium	stainless steel AISI 316 Ti, FPM
Material housing	PBT
Display	7-segment / 3 digits
Protection [EN 60529]	IP 65
Electrical connection	M12 connector
Accessories	mounting plate, adapter SDA G1/2-Ø-18-L068 (Z01176), adapter SDA G1/4-Ø-10-L050 (Z01175)

Technical Image

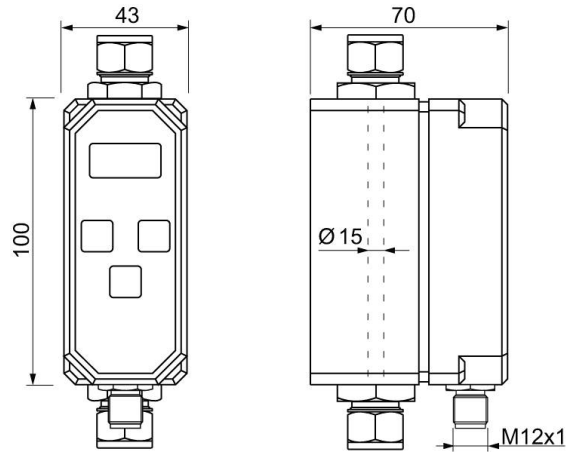

Pin Map

