


L-LAS Series

► L-LAS-TB-75

- Line laser <0.39 mW, wave length 670 nm, laser class 1
- Visible laser line, light curtain 75 mm
- Measuring range typ. 72 mm
- Resolution typ. 8 µm
- Working distance up to 2000 mm
- Integrated interference filter
- CCD line detector with 1180 pixel, 9440 subpixel (8-fold)
- Ext. teach button and potentiometer for tolerance setting
- RS232 interface (USB or Ethernet converter available)
- 2 digital inputs, 3 digital outputs
- 1 analog output (0 ...+10V or 4 ... 20mA)
- Switching state indication via 4 LEDs (1x grn, 2x red, 1x yel)

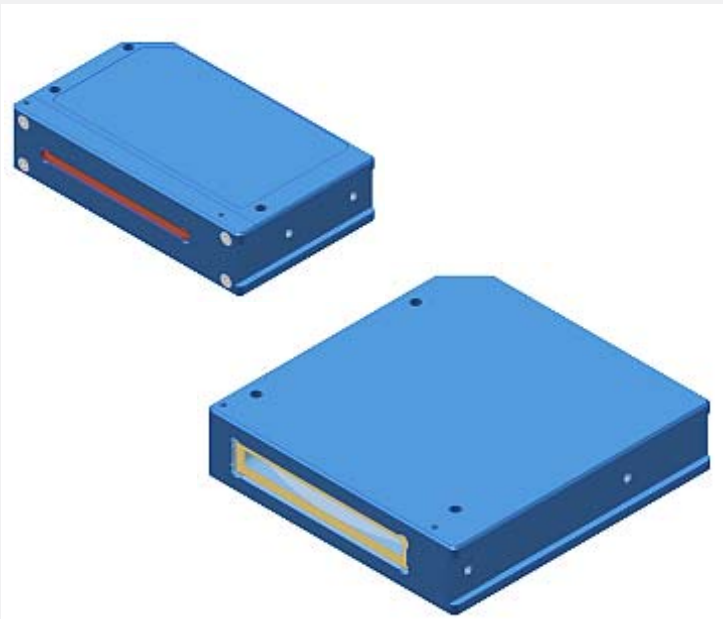

Design

Product name:

L-LAS-TB-75-T (Transmitter)

L-LAS-TB-75-R (Receiver)

L-LAS-TB-75-R-4/20 (Receiver 4...20mA)
(incl. Windows® PC software L-LAS-TB-Scope V3.18)

4/20 = Analog output 4 ... 20mA


Accessories: (cf. page 9)

TRA-L-LAS-TB-L...

(Mounting plate)

ABL-75

(Blast air top part)

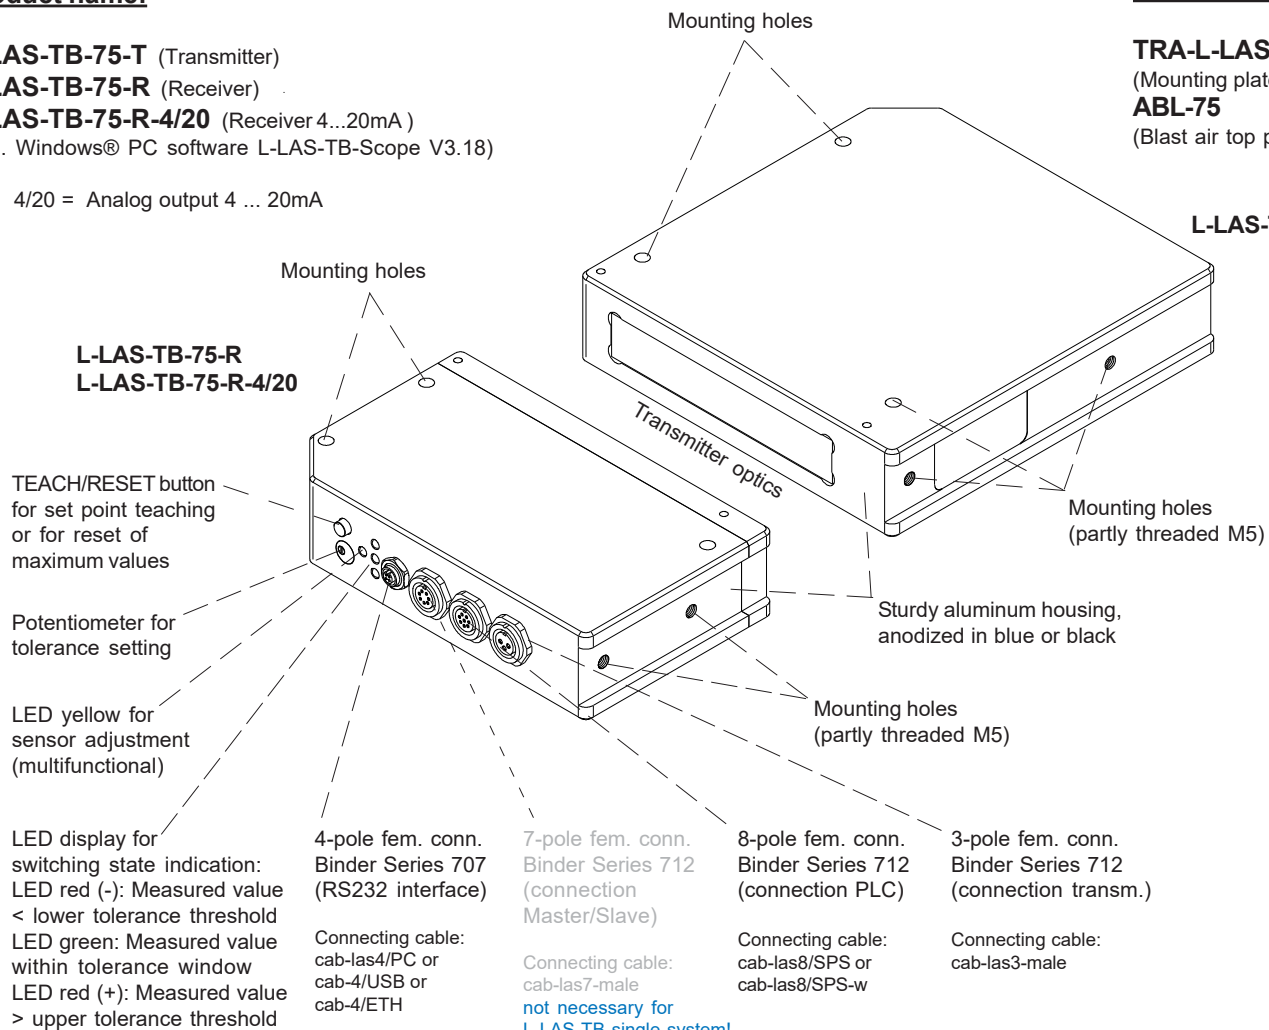




Technical Data

Model	L-LAS-TB-75-T L-LAS-TB-75-R	L-LAS-TB-75-T L-LAS-TB-75-R-4/20
Laser	Semi conductor laser, 670 nm, DC operation, <0.39 mW max. optical power, laser class 1 acc. to DIN EN 60825-1. The use of these laser transmitters therefore requires no additional protective measures.	
Working distance	up to 2000 mm	
Measuring range	typ. 72 mm	
Resolution	typ. 8 µm	
Reproducibility	typ. ± 8 µm	
Linearity	typ. 0.15% of FSR (full scale range)	
Optical filter	Interference filter RG645	
Analog output	Voltage output 0 ... +10V	Current output 4 ... 20mA
Digital output (OUT0, OUT1, OUT2)	pnp bright-switching (pnp n.c.)/nnp dark-switching (nnp n.o.) or pnp dark-switching (pnp n.o.)/nnp bright-switching (nnp n.c.), adjustable under Windows®, 100 mA, short-circuit-proof	
Digital inputs (IN0, IN1)	IN0: External trigger, IN1: Teach/Reset (double function), input voltage +Ub/0V, with protective circuit	
Voltage supply	+24VDC (± 10%)	
Sensitivity setting	under Windows® via PC	
Laser power correction	Dynamic/static mode adjustable under Windows® via PC	
Current consumption	typ. 200 mA	
Enclosure rating	Electronics: IP54, optics: IP67	
Operating temperature range	-10°C ... +50°C	
Storage temperature range	-20°C ... +85°C	
Housing material	Aluminum, anodized in black	
Housing dimensions	Transmitter: LxWxH approx. 130 mm x 125 mm x 30 mm (without connectors) Receiver: LxWxH approx. 75 mm x 125 mm x 30 mm (without connectors)	
Type of connectors of receiver	8-pole female connector type Binder Series 712 (PLC/Power) 4-pole M5 female connector Typ Binder Series 707 (PC/RS232) 3-pole female connector Binder Series 712 (connection to the transmitter) 7-pole female connector type Binder Series 712 (only necessary for master/slave system)	
Type of connector of transmitter	3-pole female connector Binder Series 712 (connection to the receiver)	
Teach button	Teach button at the housing for set point value teaching	
LED indication	LED red (+) : Measured value > upper tolerance threshold LED green : Measured value lies within tolerance window LED red (-) : Measured value < lower tolerance threshold LED yellow: Multifunctional LED (voltage indication, visualization teach process)	
EMC test acc. to	DIN EN 60947-5-2	
Scan frequency	max. 400 Hz	
Max. switching current	100 mA, short-circuit-proof	
Interface	RS232, parameterisable under Windows®	
Connecting cables	Connection to PC: cab-las4/PC or cab-4/USB or cab-4/ETH Connection to PLC: cab-las8/SPS or cab-las8/SPS-w Connection of transmitter and receiver: cab-las3-male	
Output polarity	Bright/dark-switching, adjustable under Windows®	



Dimensions

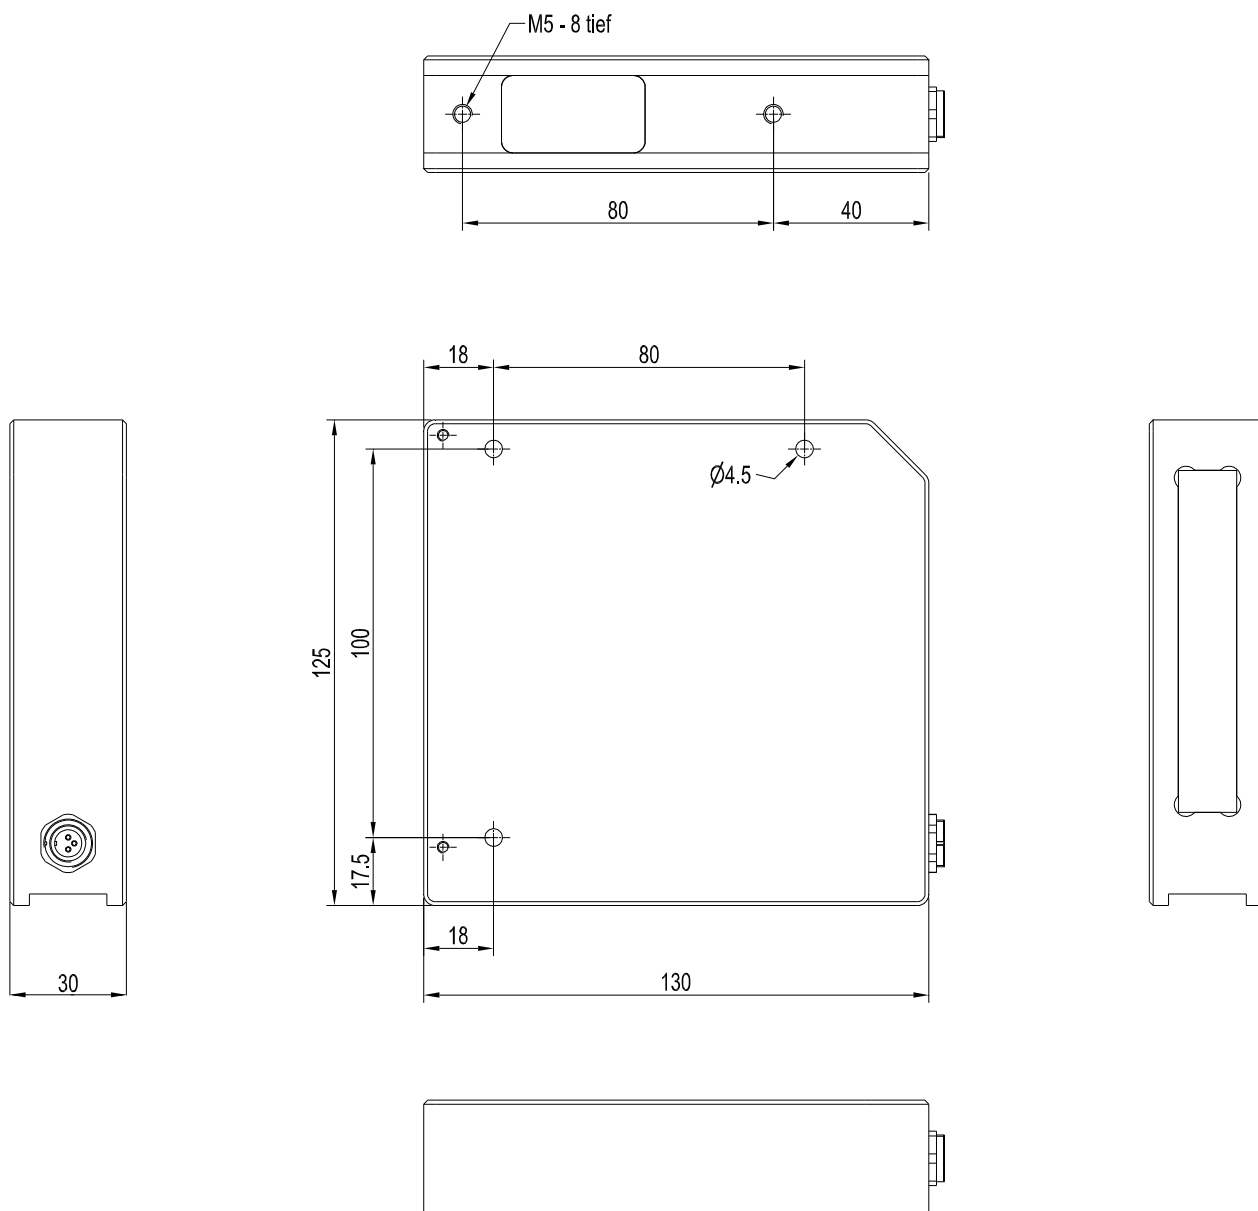
L-LAS-TB-75-T
(Transmitter)

All dimensions in mm



Dimensions

L-LAS-TB-75-R
L-LAS-TB-75-R-4/20
(Receiver)

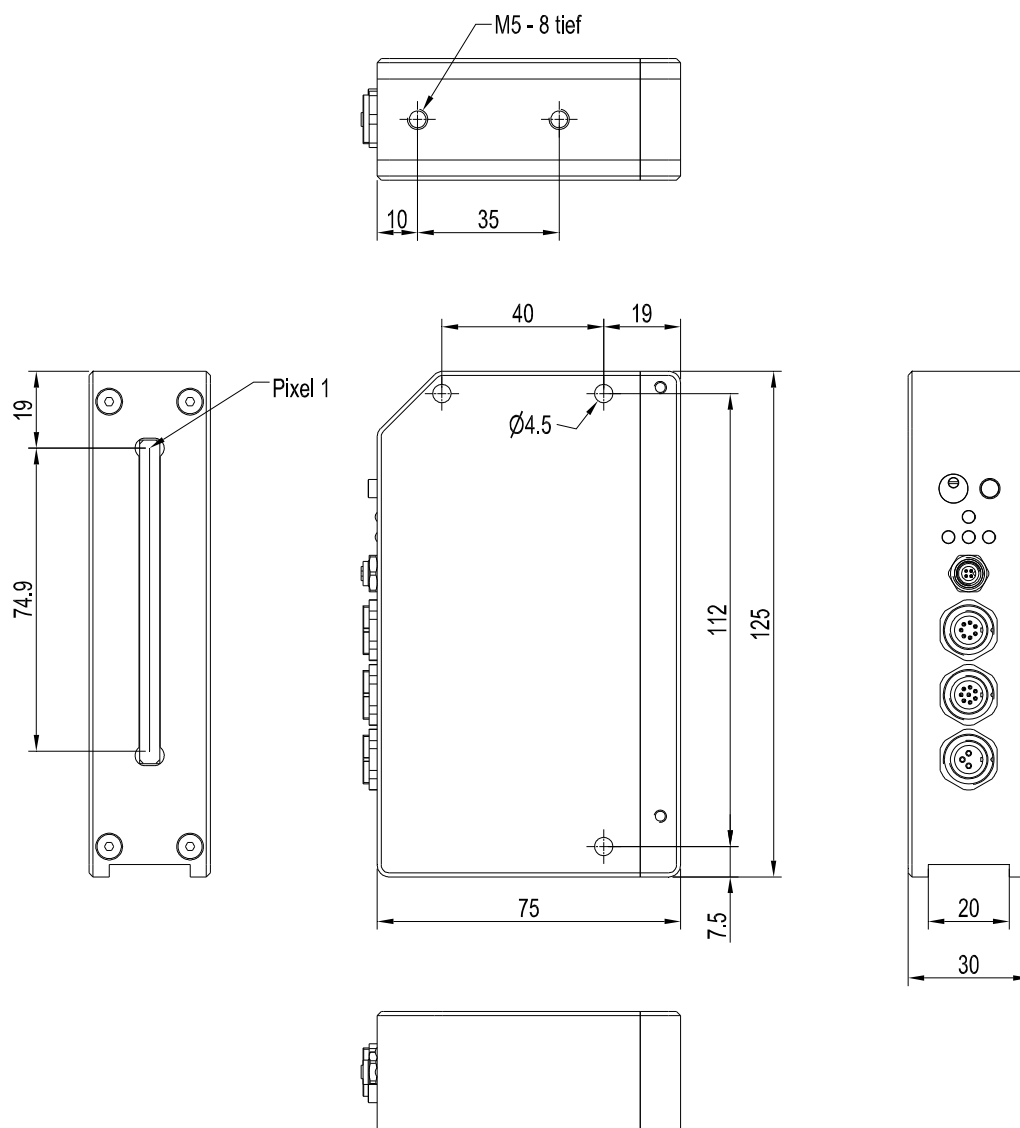

All dimensions in mm




Connector Assignment

Connection to PLC:

8-pole fem. connector Binder Series 712

Pin:	Color:	Assignment:
1	white	GND (0V)
2	brown	+24VDC ($\pm 10\%$)
3	green	IN0 (EXT TRIGGER)
4	yellow	IN1 (TEACH / RESET)
5	grey	OUT0 (-)
6	pink or black	OUT1 (+)
7	blue	OUT2 (OK)
8	red	ANA (0 ... +10V)
in case of version -4/20:		
ANA (4 ... 20mA)		

Connecting cable:
 cab-las8/SPS-(length) or
 cab-las8/SPS-w-(length) (angle type 90°)
 (standard length 2m)

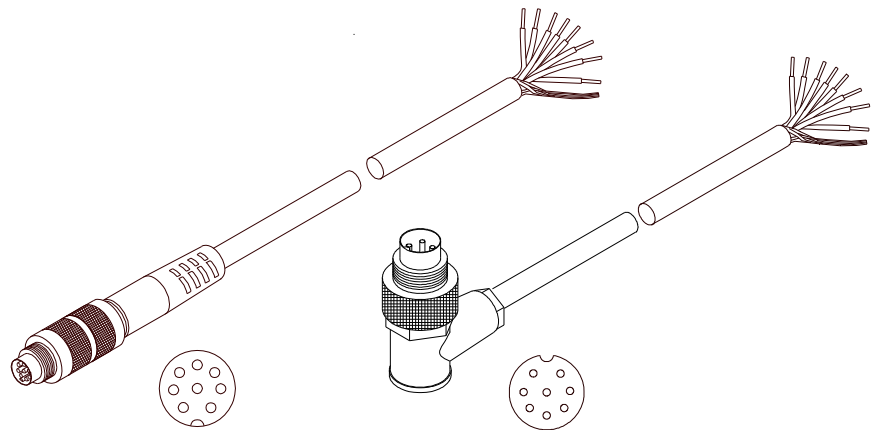

cab-las8/SPS-...
 (max. length 25m, outer jacket: PUR)

cab-las8/SPS-w-...
 (max. length 25m, outer jacket: PUR)

Connection to PC:

4-pole fem. connector Binder Series 707

Pin:	Assignment:
1	+24VDC (+Ub, OUT)
2	GND (0V)
3	RxD
4	TxD

Connection via RS232 interface at the PC:

Connecting cable:
 cab-las4/PC-(length)
 cab-las4/PC-w-(length) (angle type 90°)
 (standard length 2m)

alternative:

Connection via USB interface at the PC:

USB converter (incl. driver software):
 cab-4/USB-(length)
 cab-4/USB-w-(length) (angle type 90°)
 (standard length 2m)


alternative:

Connection to local network via Ethernet bus:


Ethernet converter (incl. software „SensorFinder“):
 cab-4/ETH-500
 (standard length 0.5m)

Optional:

External CAT5 cable, e.g.
 cab-eth/M12D-RJ45-flx-(length)

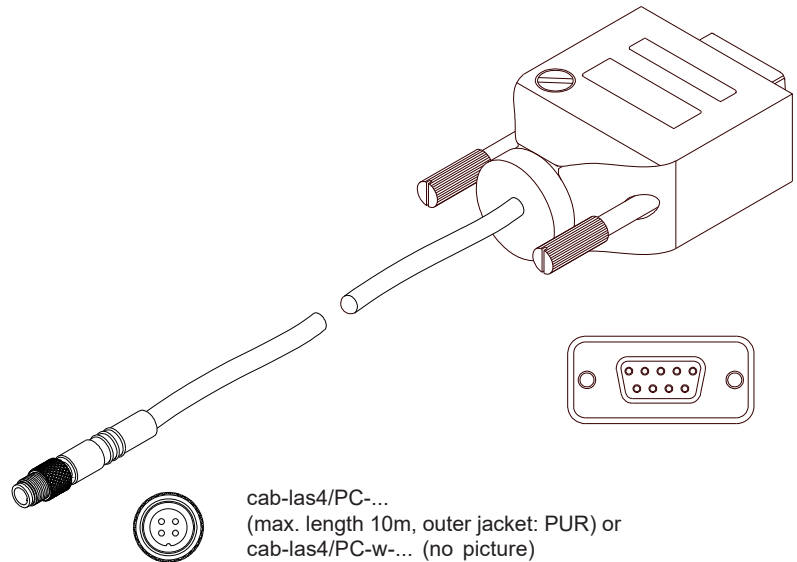

cab-las4/PC-...
 (max. length 10m, outer jacket: PUR) or
 cab-las4/PC-w-... (no picture)
 (max. length 5m, outer jacket: PUR)

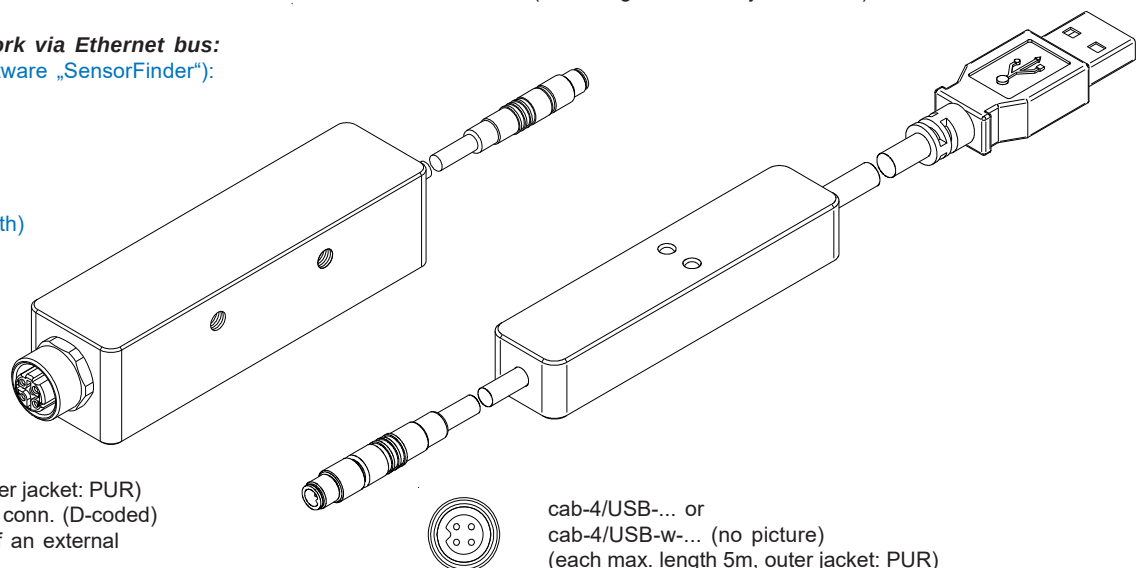

cab-4/ETH-500
 (length 0.5m, outer jacket: PUR)
 4-pole M12 fem. conn. (D-coded)
 for connection of an external
 CAT5 cable, e.g.
 cab-eth/M12D-RJ45-flx-(length)

cab-4/USB-... or
 cab-4/USB-w-... (no picture)
 (each max. length 5m, outer jacket: PUR)



Connector Assignment

**Connection L-LAS-TB-...-T to
L-LAS-TB-...-R (or L-LAS-TB-...-R-4/20)
3-pol. fem. connector Binder series 712**

Pin: Assignment:


- | | |
|---|------------------------|
| 1 | +5VDC |
| 2 | 0V (GND) |
| 3 | I-CONTROL (0V ... +5V) |

Connecting cable:


cab-las3-male-(length)

cab-las3-male-w-(length) (angle type 90°)

(standard length 2m)

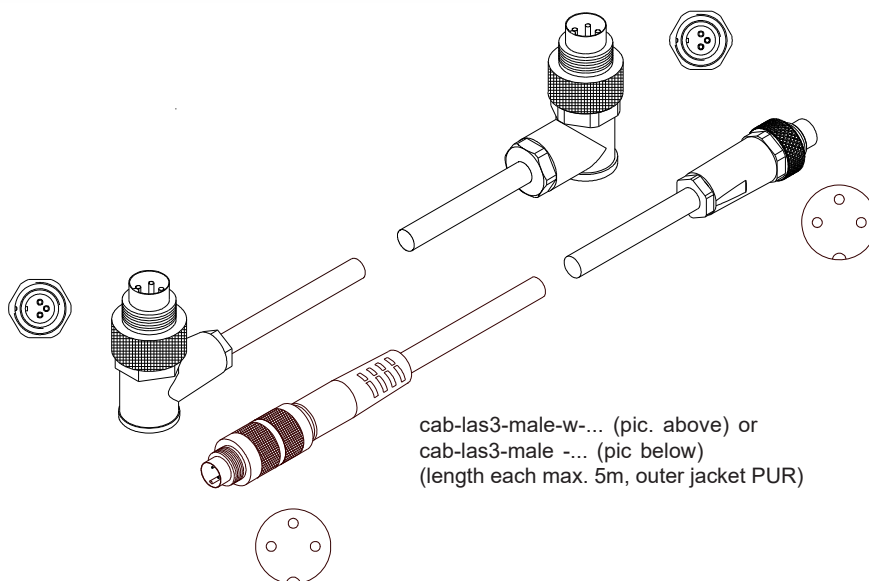


LED Display

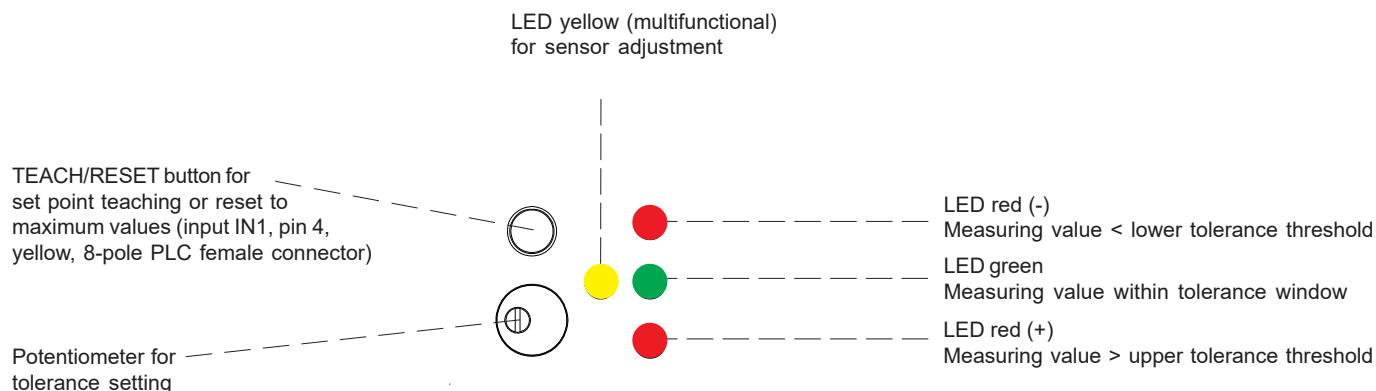

Laser Information

The laser transmitters of L-LAS-TB series comply with laser class 1 according to EN 60825-1. Under reasonably foreseeable conditions a class 1 laser is safe. The reasonably foreseeable conditions are kept during specified normal operation. The use of these laser transmitters therefore requires no additional protective measures.

The laser transmitters of L-LAS-TB series are supplied with an information label „CLASS 1 Laser Product“.






Parameterization

Windows® software L-LAS-TB-Scope:

The L-LAS-TB sensor can be easily parameterised with the Windows® user interface.

For this purpose the sensor is connected to the PC with the serial interface cable cab-las4/PC (or with the USB converter cab-4/USB or the Ethernet converter cab-4/ETH). When parameterisation is finished, the PC can be disconnected again.

Windows® user interface:

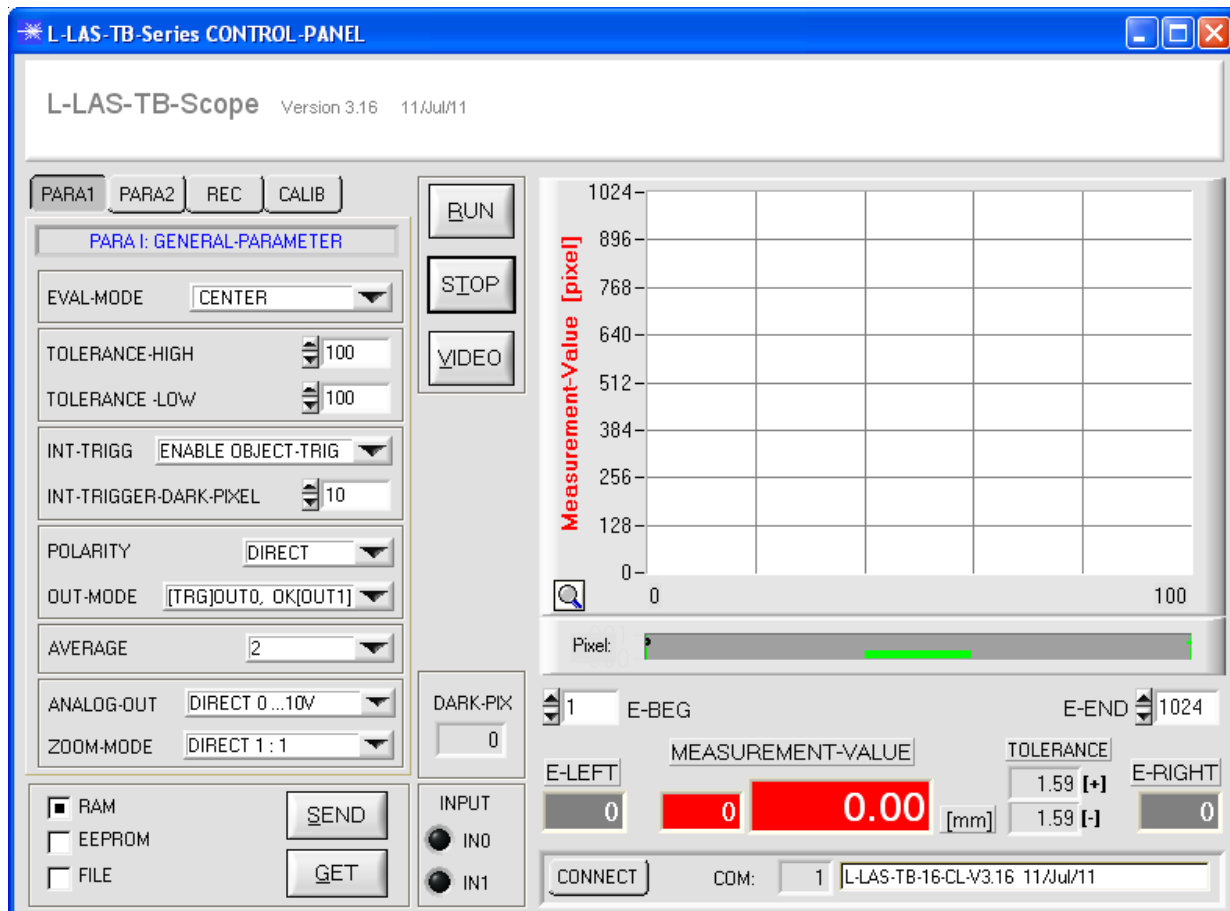

With the help of the L-LAS-TB-Scope software the following settings can be made at the sensor:

- Setting of laser power and type of automatic power correction
- Polarity of digital outputs
- Different evaluation modes
- Start of the teach process by software button
- Setting of tolerance ranges for monitoring the measured value

Furthermore, various numerical and graphical measured quantities can be visualized with the L-LAS-TB-Scope software. For example, the raw data of the CCD line sensor can be displayed graphically and numerically.



Accessories

Mounting plate

for L-LAS-TB-75-T and L-LAS-TB-75-R (or L-LAS-TB-75-R-4/20):

(please order separately)

TRA-L-LAS-TB-L100 (Total length traverse 400 mm, distance transmitter/receiver max. 100 mm)

TRA-L-LAS-TB-L200 (Total length traverse 500 mm, distance transmitter/receiver max. 200 mm)

TRA-L-LAS-TB-L300 (Total length traverse 600 mm, distance transmitter/receiver max. 300 mm)


TRA-L-LAS-TB-L400 (Total length traverse 700 mm, distance transmitter/receiver max. 400 mm)

TRA-L-LAS-TB-L500 (Total length traverse 800 mm, distance transmitter/receiver max. 500 mm)

TRA-L-LAS-TB-L1000 (Total length traverse 1300 mm, distance transmitter/receiver max. 1000 mm)

TRA-L-LAS-TB-L1500 (Total length traverse 1800 mm, distance transmitter/receiver max. 1500 mm)

(Aluminium housing, anodized in black)

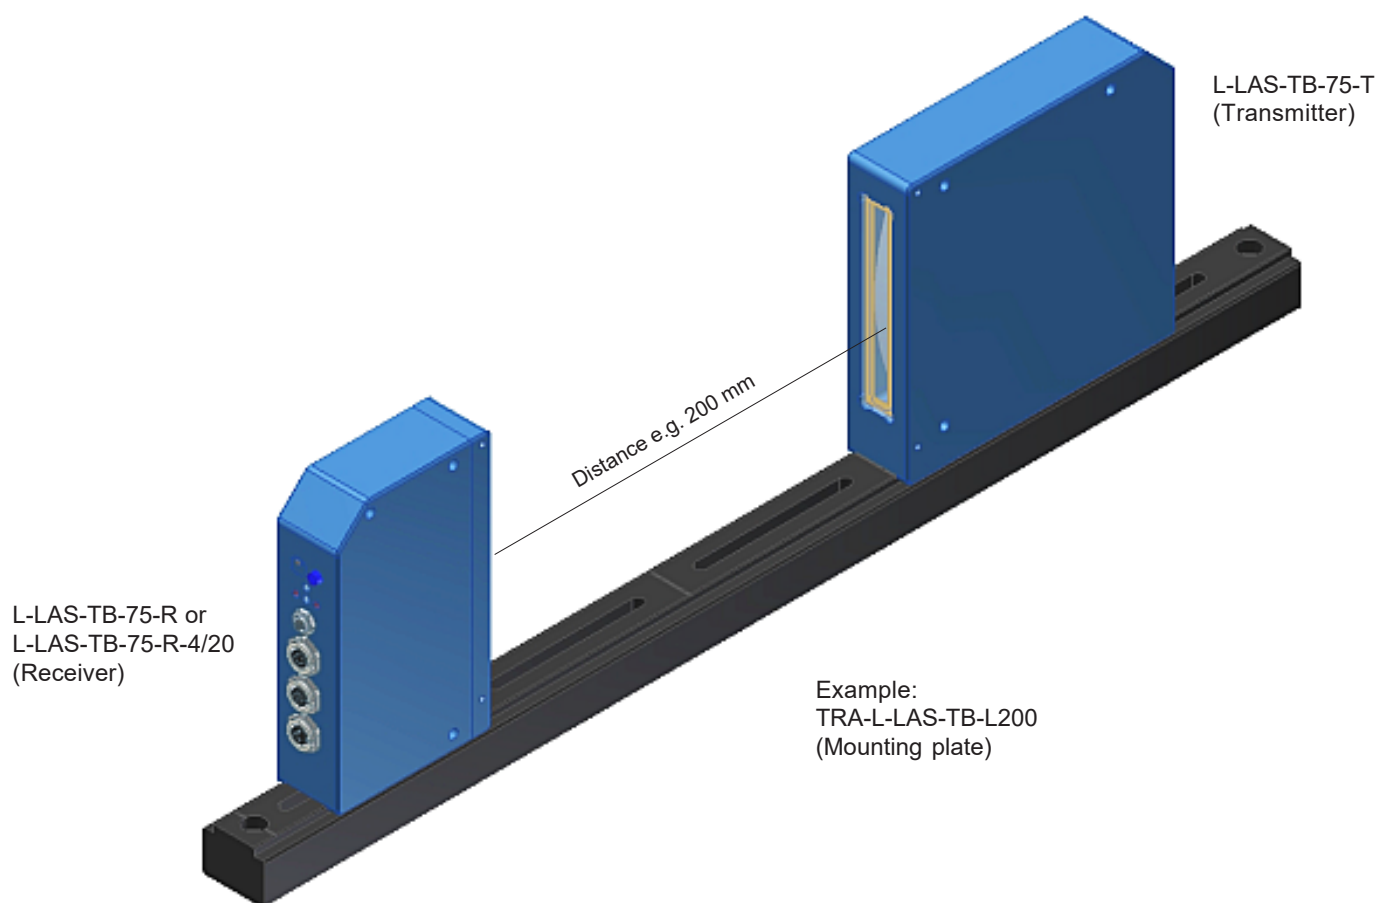

Blast air top part

for L-LAS-TB-75-T and L-LAS-TB-75-R (L-LAS-TB-75-R-4/20):

(please order separately for transmitter and receiver each)

ABL-75

(Plastic housing, black)

