



DATE	REV.	DESCRIPTION	SIGNED
06.09.2010	01	Changed the lenght of the adapter from 21mm to 17.5mm	Marco Mazzolini
04.11.2010	02	Changed the diameter of the screw M3x0.5 from 4mm to 3.90mm, increased the width of the holes of the contacts female from 0.8mm to 1.1mm and increased the lenght of the fixing screw from 2.9 to 3.3mm	Marco Mazzolini
08.11.2010	03	Added dimension 0.6mm referring to depth of internal core.	Marco Mazzolini
13.05.2011	04	Cutted the contacts and decreased the hole of the fixing screw from 4mm to 3.8mm	Marco Mazzolini
13.06.2011	05	improved the dimensions	Marco Mazzolini
07.11.2011	06	changed the fixing screw dimension from M2,5X0.5-6g TO M2,5X0.45-6g	Lorenzo Cimmino
13.07.2012	07	The fixing screw must be in STAINLESS STEEL AISI304 Apply N°1 NBR PROFILED GASKET	Lorenzo Cimmino


MATERIAL: PA66
TEMPERATURE RANGE: -40°C / +90°C

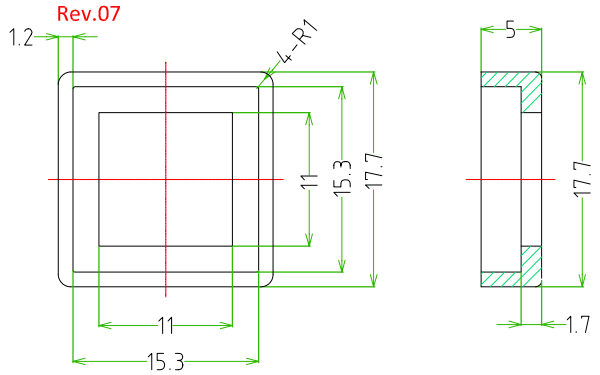


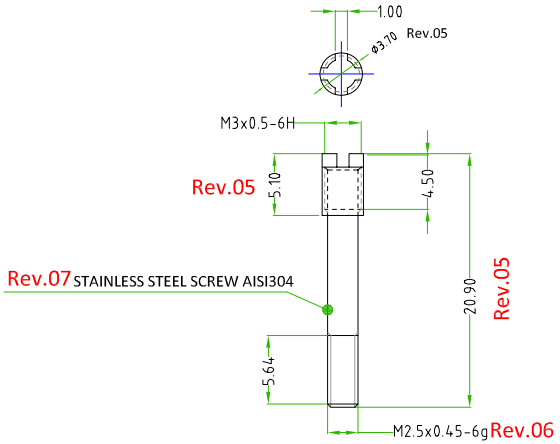


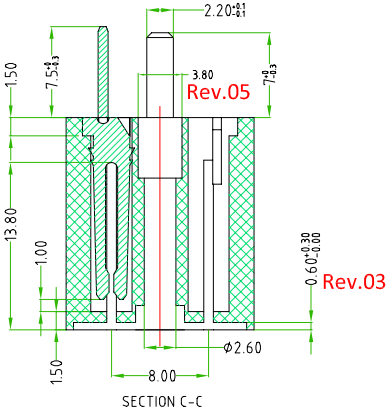





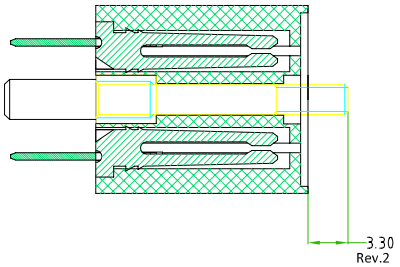


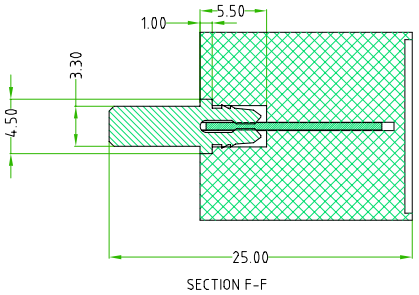

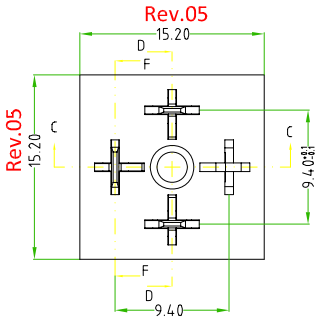

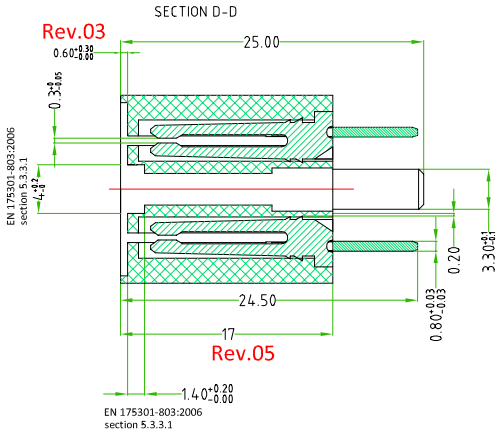

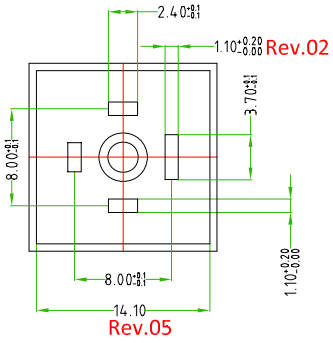



TOLLERANZE	DISEGNATORE	DATA	SCALA	DISEGNO N.
±0.1	LORENZO CIMMINO	27.08.2010	1:1	
U.d.M / ANGOLO	CONTROLLATO			

DESCRIZIONE: ADAPTER,CONNECTOR DIN43650-C FROM 9.4mm MALE TO 8mm FEMALE

TIPO: ADAPTER

MATERIALE:

H.T.P. HIGH TECH PRODUCTS

CODICE: CP1-CBP2