



A	PRESS CABLE SREW
B	LAMELLAE PRESS–CABLE SEAL
C	GASKET PRESS-CABLE SEAL
D	HOUSING BLACK
E	SCREW CONTACT GOLD PLATED
F	O-RING
G	INTERNAL CORE M8
H	M8 BRASS+NICKEL PLATED
I	COPPER DUCT

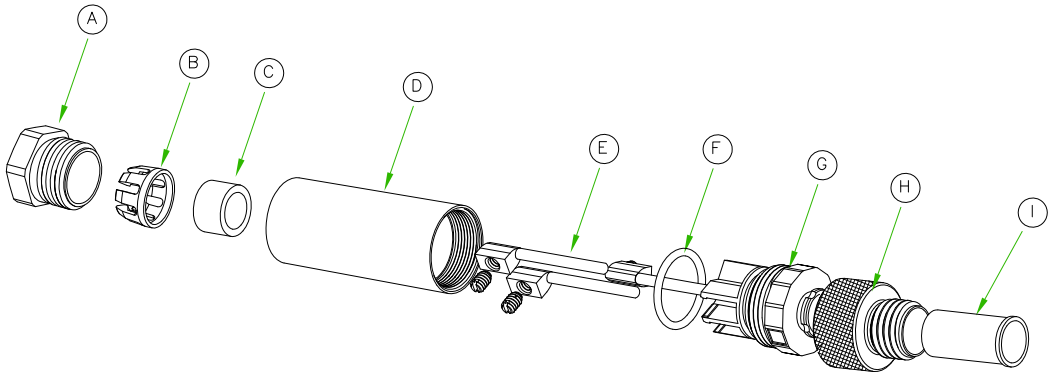

CONNECTOR FEATURES	
PRODUCT TYPE	M8 FIELD ATTACHABLE
CONTACT TYPE	MALE(TO SCREW)
NUMBER OF CONTACTS	3POLES
HOUSING MATERIAL/COLOUR	PA66/BLACK
HOUSING TYPE	180°
COUPLING NUT MATERIAL	BRASS+NICKEL PLATED
O-RING	NBR
CABLE DIAMETER	FROM ø3,5mm TO ø5mm
CONDUCTOR SIZE	FROM 0,14mm² TO 0,5mm²
RATED VOLTAGE	50V AC / 60V DC
RATED CURRENT	3A
PROTECTION CLASS	IP65
TEMPERATURE RANGE	FROM -40°C TO +90°C
CONNECTOR WITH H.T.P.LOGO	

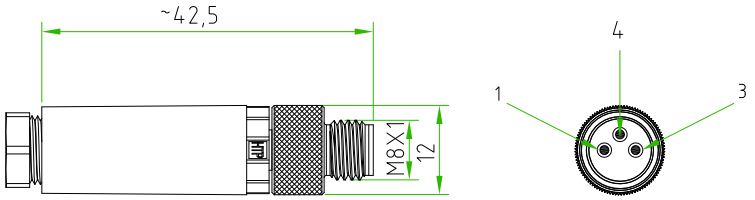

TOLLERANZE ±0.2	DISEGNATORE LORENZO CIMMINO	DATA 02.01.17	SCALA 1:1		DISEGNO N.
U.d.M / ANGOLO	CONTROLLATO				
DESCRIZIONE: M8 MALE STRAIGHT 180°,3 POLES,BLACK HOUSING,FIELD ATTACHABLE WITH SCREW CONTACTS. CONNECTOR WITH H.T.P.LOGO		TIPO: M8			MATERIALE
High Tech Products HTP H.T.P. HIGH TECH PRODUCTS		CODICE: 08MC3000-S			