


PURPLE(0,34mm²) 1
RED(0,34mm²) 2
GREY(0,34mm²) 3
RED/BLUE(0,34mm²) 4
GREEN(0,34mm²) 5
BLUE(0,75mm²) 6
GREY/PINK(0,34mm²) 7
WHITE/GREEN(0,34mm²) 8
WHITE/YELLOW(0,34mm²) 9
WHITE/GREY(0,34mm²) 10
BLACK(0,34mm²) 11
N.C. 12
YELLOW/BROWN(0,34mm²) 13
BROWN/GREEN(0,34mm²) 14
WHITE(0,34mm²) 15
YELLOW(0,34mm²) 16
PINK(0,34mm²) 17
N.C. 18
N.C. 19




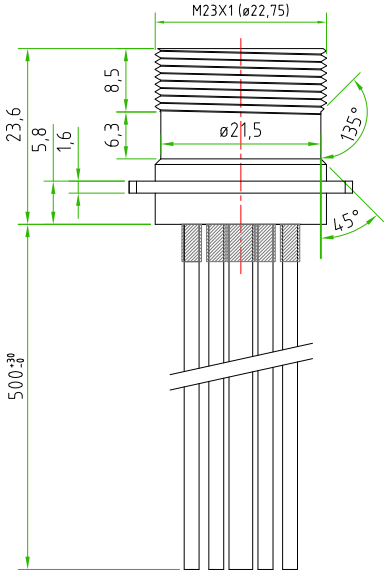


CONNECTOR FEATURES		
	CONNECTOR TYPE	M23 TO PANEL WITH FLANGE
	MOUNTING TYPE	FRONTAL
	NUMBER OF CONTACTS	n°19
	CONTACT TYPE	MALE
	FIXING HOLES DISTANCE	22mm
	FIXING HOLES DIAMETER	ø3,2mm
	HOUSING MATERIAL	Brass+nickel plated (CuZnNi)
	FLANGE SIZE	30mmx30mm
	CONDUCTOR MATERIAL	TPO
	CONDUCTOR LENGHT	500mm
	CONDUCTOR SECTION	15WIRES: 0.34mm² BLUE WIRE: 0.75mm²
	NUMBER OF CONDUCTORS	n°16
	CONNECTOR WITHOUT ANY LOGO	


THE CONNECTOR MUST HAVE 19POLES
ALSO IF ARE CONNECTED ONLY 16POLES

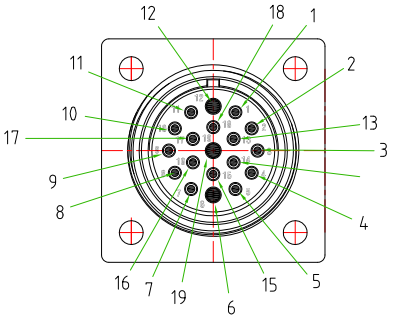

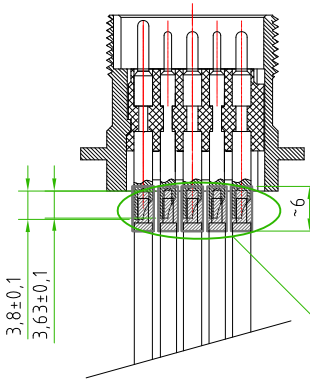

SCALE 2:1
THERMO REDUCING TUBE





TOLLERANZE ±0.2	DISEGNATORE ROBERTO SUGLIANI	DATA 01.07.16	SCALA 1:1		DISEGNO N. 1-1
U.d.M / ANGOLO	CONTROLLATO				
DESCRIZIONE: M23 CONNECTOR MALE 180° ,19POLES(16POLES CONNECTED),TO PANEL,FRONTAL MOUNTING,WITH n°16 WIRES TPO CONNECTED (n°15x0,34mm² + n°1x0,75mm²) L=500mm-CONNECTOR WITHOUT ANY LOGO		TIPO M23			RIF.CLIENTE
H.T.P. HIGH TECH PRODUCTS		CODICE 23MP19P0E-FL			