

Accessories for inductive and kapacitive sensors | GS M30

- Connection of sensors with armoured cable
- Easy exchange of sensors in heavy duty areas
- IP 68-plug

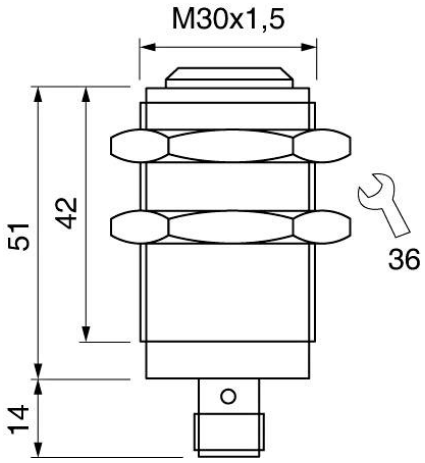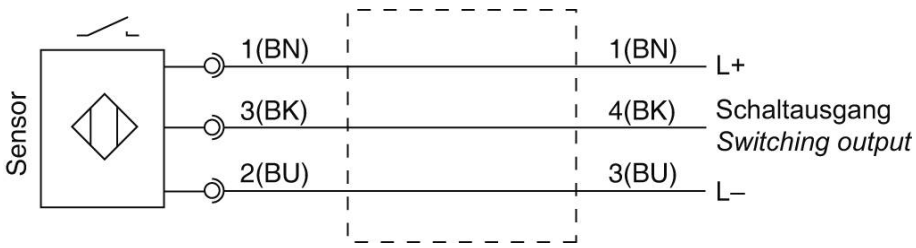

TYPE	GS M30
Product ID	P31494
Connectable Sensors	1.0000
Supply voltage	10 V DC ... 55 V DC
Ambient temperature	-20 °C ... 90 °C
Protection [EN 60529]	IP68 / IP 67
Electrical connection	Lemo plug system, M12 connector
Note	for sensors with metal armored cable IGMF 010 GSP-PZ / INFW 020 GSP-PZ
Technical Image	

Pin Map


Sensor
1(BN)
3(BK)
2(BU)
1(BN)
4(BK)
3(BU)
L+
Schaltausgang
Switching output
L–