
Specially sealed sensors - climatic proofed for use in a temperature range up to 120°C | GS 250

- Connection of sensors with armoured cable
- Easy exchange of sensors in heavy duty areas
- IP 68-plug

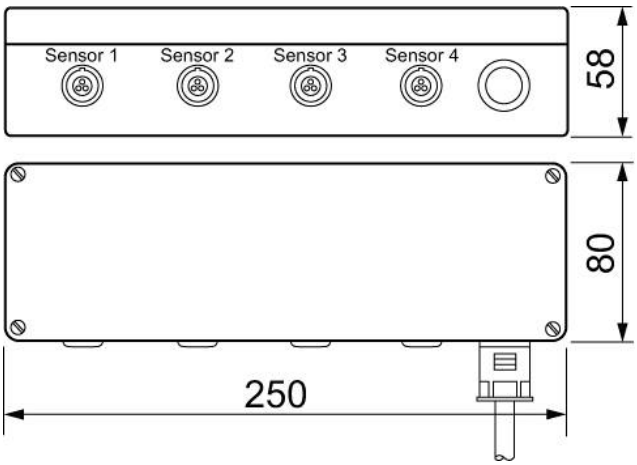


TYPE	GS 250
Product ID	P31218
Connectable Sensors	4.0000
Supply voltage	10 V DC ... 55 V DC
Ambient temperature	-20 °C ... 75 °C
Protection [EN 60529]	IP 68
Electrical connection	10 m TPE-numbered cable 7x0.5 mm²
Note	for sensors with metal armored cable IGMF 010 GSP-PZ / INFW 020 GSP-PZ
Technical Image	

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH

TEL. +49 4346 41580 . ege-elektronik.com

Pin Map

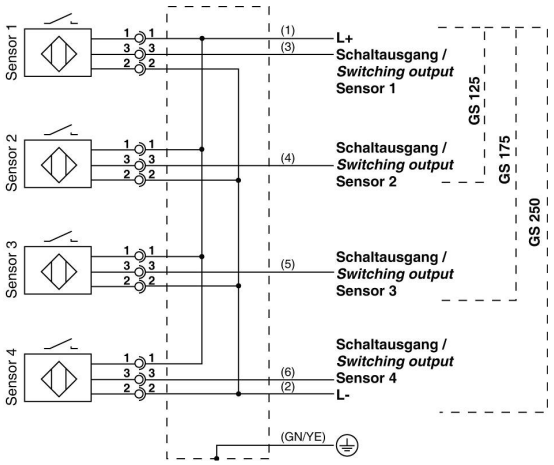
Sensor 1
Sensor 2
Sensor 3
Sensor 4
1
3
2
(1)
(3)
(4)
(5)
(6)
(2)
(GN/YE)
L+
Schaltausgang /
Switching output
Sensor 1
Schaltausgang /
Switching output
Sensor 2
Schaltausgang /
Switching output
Sensor 3
Schaltausgang /
Switching output
Sensor 4
L-
GS 125
GS 175
GS 250