
Accessories for inductive and kapacitive sensors | KBM 030 A-ST52


- Impact- and shock resistant, protected installation of indictive sensors
- Simple adjustment via slotted holes
- Mount and replace sensor quickly and precicely

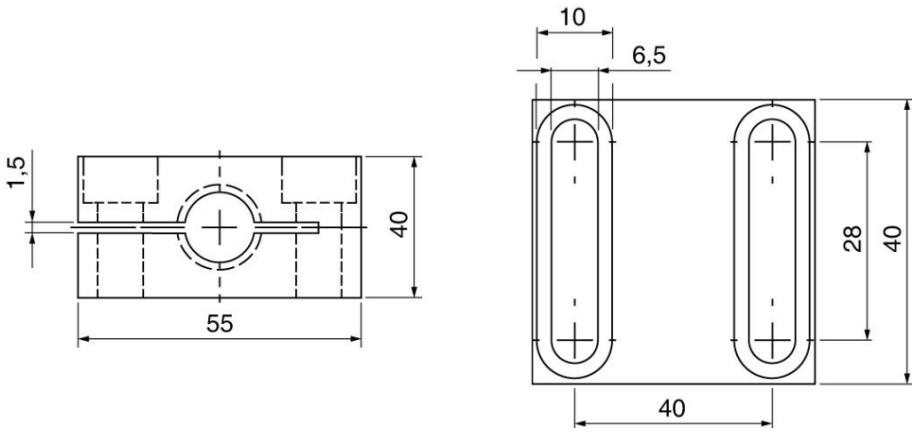

TYPE	KBM 030 A-ST52
Product ID	Z01211
Description	mounting clamp for metal face sensors
Note	Mounting clambs are fastened to their metal surface using M6 hexagon socket screws. Make sure that the proivided stainless steel washers have been placed in-between. The typical torque is 6 Nm.
Material	ST52, hardened
For sensors threaded:	M30
Dimensions L1xL2xL3	55x40x40
Hole spacing e	40 mm
Sensor installation	flushed relative to the set back surface (see drawing)
Technical Image	

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH
TEL. +49 4346 41580 . ege-elektronik.com

Pin Map

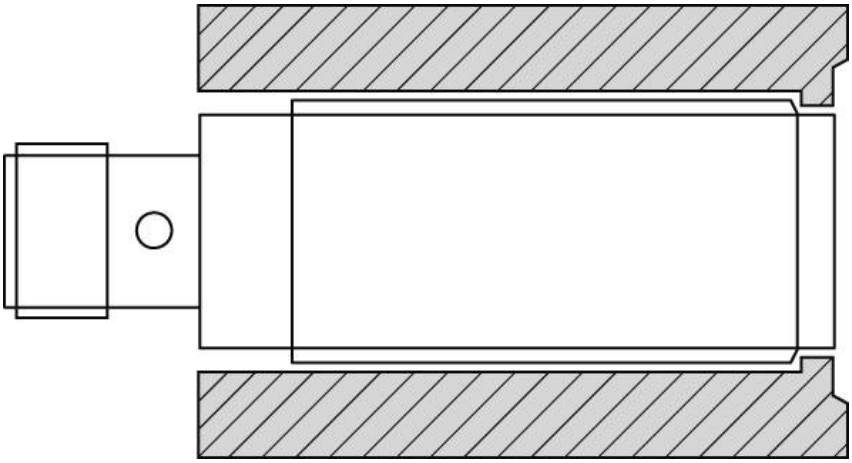

EGE-ELEKTRONIK SPEZIAL-SENSOREN GMBH

TEL. +49 4346 41580 . ege-elektronik.com