Rev.	Modify	Date	Firma	Approved



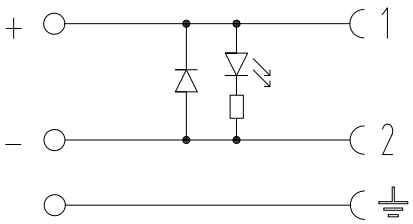



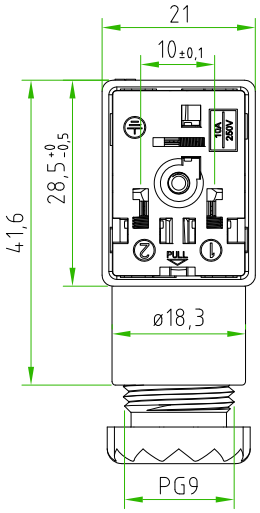

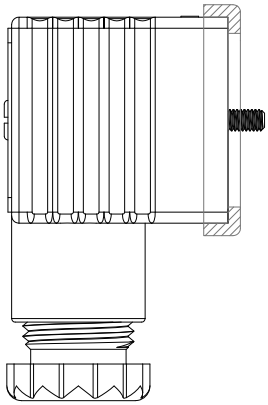

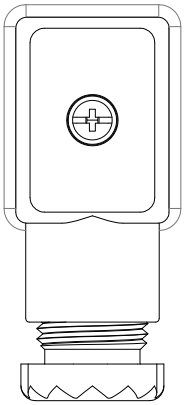

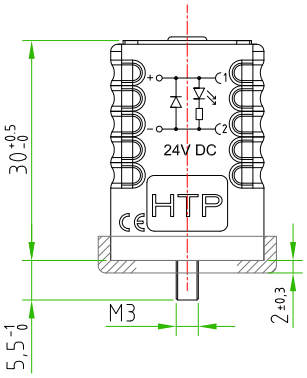

CONNECTOR FEATURES	
PRODUCT TYPE	EN175301-803 STANDARD FORM B FIELD ATTACHABLE
HOUSING MATERIAL/COLOUR	PA66 /TRANSPARENT
PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
INTERNAL CORE MATERIAL/COLOUR	PA66 /BLACK
HEIGHT HOUSING	30mm
CONTACTS SPACING	10mm
CONTACTS TYPE	SCREW CONTACTS(with protection plate)
NUMBER OF POLES	2POLES+EARTH
EARTH POSITIONING	H.12 (TURNABLE)
CABLE EXIT	PG9
SUITABLE CABLE	FROM ø6mm TO ø8mm
MAX.CONDUCTOR SIZE	1,5mm²
PROTECTION CLASS	IP67
CIRCUIT TYPE	RED LED + DIODE(1A)
RATED VOLTAGE	24V DC
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
GASKET TYPE	PROFILED NBR
FIXING SCREW	M3X0,5 L=32,5mm
CONNECTOR WITH H.T.P. LOGO	

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Rev.	Modify	Date	Signed	Approved

Designer	CIMMINO L.	Date	2019-05-14	Tollerance ±0,2	Units: mm	Series EN175301-803 (form B)	Drawing n. 1/1
Approved	SUGLIANI R.	Date	2019-05-14	Scale 1:1	Size: A4	Customer code:	

A4

HTP™ High Tech Products S.R.L.

DESCRIPTION

RECTANGULAR CONNECTOR EN175301-803 FORM B,FIELD ATTACHABLE,10mm, 2P.+PE, WITH RED LED+DIODE, 24V,TRANSPARENT HOUSING, PG9. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER

M2TS2DL1

H.T.P. High Tech Products S.R.L. Via Lesina,45 -24030- Brembate di Sopra (Bg) - ITALY Phone:+39.035692509 Fax:+39.035203291 E-mail: info@webhtp.eu Web: http://www.webhtp.eu/

ALL RIGHTS ARE RESERVED.