Rev.	Modify	Date	Firma	Approved







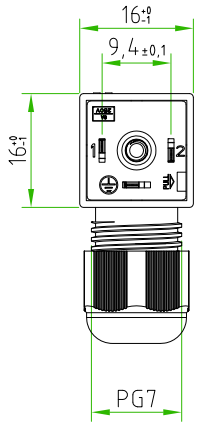







CONNECTOR FEATURES		
	PRODUCT TYPE	SQUARE MICRO INDUSTRIAL STANDARD FORM C FIELD ATTACHABLE.
	HOUSING MATERIAL/COLOUR	PA66 /BLACK
	PRESS-CABLE MATERIAL/COLOUR	PA66 /BLACK
	INTERNAL CORE MATERIAL/COLOUR	PA66 /BLACK
	HEIGHT HOUSING	26mm
	CONTACTS SPACING	9,4mm
	CONTACTS TYPE	SCREW CONTACTS(with protection plate)
	NUMBER OF POLES	2POLES+EARTH
	EARTH POSITIONING	H.6 (TURNABLE)
	CABLE EXIT	SK SYSTEM (SW15)
	SUITABLE CABLE	FROM ø3,5mm TO ø5,5mm
	MAX.CONDUCTOR SIZE	0,75mm²
	PROTECTION CLASS	IP67
	CIRCUIT TYPE	WITHOUT ELECTRONIC
	RATED VOLTAGE	250V AC / 300V DC
	CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
	GASKET TYPE	PROFILED NBR
	FIXING SCREW	M3X0,5 L=28mm
	CONNECTOR WITH H.T.P. LOGO	

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Rev.	Modify	Date	Signed	Approved

A4

Designer	SUGLIANI R.	Date	2020-11-05	Tollerance	±0,3	Units:	mm	Series	INDUSTRIAL STANDARD (form C)	Drawing n.
Approved	CIMMINO L.	Date	2020-11-05	Scale	1:1	Size:	A4	Customer code:		1/1

HTP™ High Tech Products S.R.L.

DESCRIPTION

SQUARE MICRO CONNECTOR INDUSTRIAL STANDARD (form C),FIELD ATTACHABLE, 2P.+PE, WITHOUT ELECTRONIC, 250V AC/300V DC, BLACK HOUSING, SK SYSTEM. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER

P2NZ2000-SK

H.T.P. High Tech Products S.R.L. Via Lesina,45 -24030- Brembate di Sopra (Bg) - ITALY Phone:+39.035692509 Fax:+39.035203291 E-mail: info@webhtp.eu Web: http://www.webhtp.eu/

ALL RIGHTS ARE RESERVED.