Rev.	Modify	Date	Signed	Approved

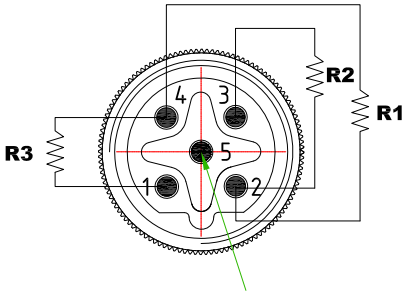

R1: Resistance 220 Ω 1/4W

R2: Resistance 330 Ω 1/4W

R3: Resistance 330 Ω 1/4W

PIN 5 IS CONNECTED TO THE SHIELD NUT.

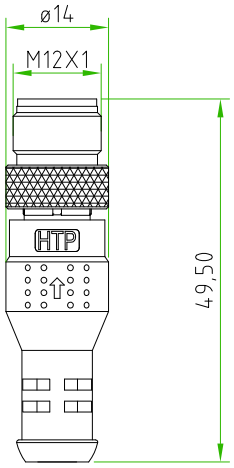



CONNECTOR FEATURES		
	PRODUCT TYPE	M12 TERMINATOR CIRCULAR CONNECTOR B-CODED WITH MOULDED CABLE
	CONNECTOR TYPE	STRAIGHT 180°
	CONTACTS TYPE	MALE 5POLES
	NUMBER OF CONTACTS CONNECTED	N°5
	PROTECTION CLASS	IP69K
	RATED VOLTAGE	60V AC/DC
	RATED CURRENT	4A
	TOTALLY SHIELDED CONNECTOR (PIN 5 CONNECTED TO THE NUT SHIELD)	
	CONNECTOR WITH H.T.P.LOGO	

CUSTOMER APPROVAL	
SIGNATURE	DATE
PLEASE SIGN AND RETURN	

Designer	CIMMINO L.	Date 2017-06-27	Tollerance ±0.3	Units: mm	Series M12	Drawing n. 1-1
Approved	SUGLIANI R.	Date 2017-06-27	Scale 1:1	Size: A4	Customer code:	

A4

HTP™ High Tech Products S.R.L.

DESCRIPTION

CIRCULAR CONNECTOR M12,TERMINATOR,B-CODED,MALE,STRAIGHT 180°,5POLES, TOTALLY SHIELDED,WITH N°2 RESISTANCES 330Ω+ N°2 RESISTANCE 220Ω,PIN 5 CONNECTED TO THE NUT. CONNECTOR WITH H.T.P.LOGO

H.T.P.PART NUMBER

B-12MJ5000-TERM

H.T.P. High Tech Products S.R.L. Via Lesina,45 -24030- Brembate di Sopra (Bg) - ITALY Phone:+39.035692509 Fax:+39.035203291 E-mail: info@webhtp.eu Web: http://www.webhtp.eu/

ALL RIGHTS ARE RESERVED.